


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2		H	ECR-13-001734	01MAR2013	LD	JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE in mm	0,485<=Ø<0,546
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,00
DRAIN WIRE	Ø RANGE	0,4 - 0,55
	MATERIAL	COPPER
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	-
	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D)	6,2
PULLING FORCE	MAX.	100 N

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT5E F/UTP SOLID PR04 AWG24 LSZH
- CABLE COLORED TYPES UPON REQUEST.

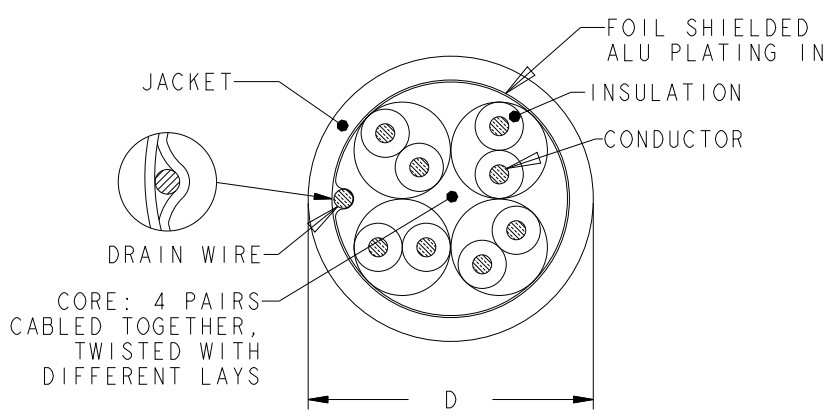

WHITE RAL 9010	500	REEL	219420-7
WHITE RAL 9010	1000	REEL	219420-3
WHITE RAL 9010	305	PULL BOX	219420-2
WHITE RAL 9010	305	REEL	219420-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	01Mar2013	TE TE Connectivity											
DIMENSIONS: mm		CHK	01Mar2013												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	01Mar2013												
<table border="0"> <tr><td>0 PLC</td><td>±-</td></tr> <tr><td>1 PLC</td><td>±-</td></tr> <tr><td>2 PLC</td><td>±-</td></tr> <tr><td>3 PLC</td><td>±-</td></tr> <tr><td>4 PLC</td><td>±-</td></tr> <tr><td>ANGLES</td><td>±-</td></tr> </table>		0 PLC	±-		1 PLC	±-	2 PLC	±-	3 PLC	±-	4 PLC	±-	ANGLES	±-	PRODUCT SPEC
0 PLC	±-														
1 PLC	±-														
2 PLC	±-														
3 PLC	±-														
4 PLC	±-														
ANGLES	±-														
MATERIAL	FINISH	APPLICATION SPEC	-	NAME	CABLE, CAT5E, F/UTP, SOLID, PR04, AWG24, LSZH										
		WEIGHT	-	SIZE	A3										
		CUSTOMER DRAWING		CAGE CODE	-										
				DRAWING NO	©-219420										
				RESTRICTED TO	-										
				SCALE	NTS										
				SHEET	1 OF 1										
				REV	H										