


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2	H	ECR-13-001734	01MAR2013	LD JS

FINISHED CABLE DATA

CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE in mm	0,485<=Ø<0,545
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,00
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	COPPER BRAID
	PLATING	TINNED
	COVERAGE	40% APPROX.
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D)	6,5 mm
PULLING FORCE	MAX.	100 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT5E SF/UTP SOLID PR04 AWG24 LSZH
3. CABLE COLORED TYPES UPON REQUEST.

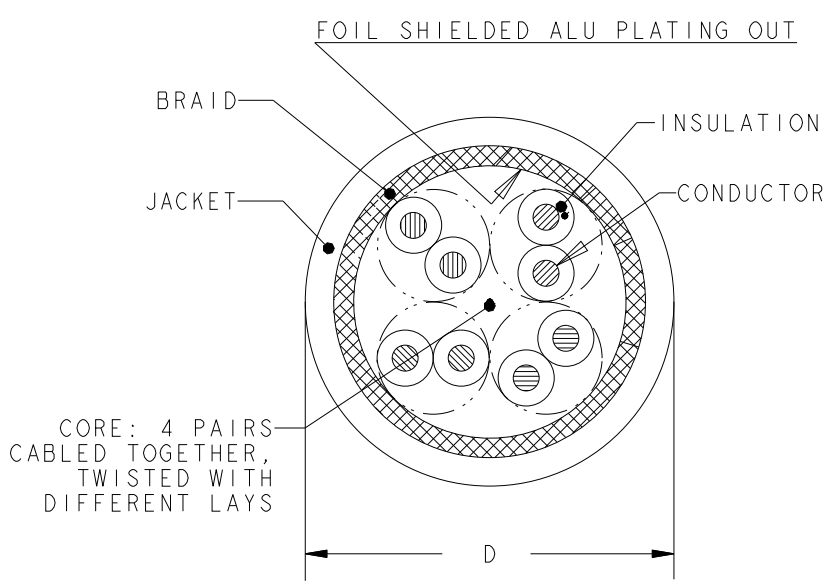

WHITE	500	REEL	219484-2
WHITE	1000	REEL	219484-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	01Mar2013	 TE Connectivity	NAME CABLE, CAT5E, SF/UTP, SOLID, PR04, AWG24, LSZH
DIMENSIONS: mm		CHK	01Mar2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	01Mar2013		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC	-		
MATERIAL	-	FINISH	-	APPLICATION SPEC	-
		WEIGHT	-	SIZE	A3
		CUSTOMER DRAWING		CAGE CODE	-
				DRAWING NO	©-219484
				RESTRICTED TO	-
				SCALE	NTS
				SHEET	1 OF 1
				REV	H