


### AMP-TWIST 6AS SL Jack 1711592-[] and 1711716-[]


**AMP-TWIST-6AS SL JACK**  
PN 1711592-[] or 1711716-[]

**CABLE REQUIREMENTS**  
(Product Spec.108-93028)

**TOOL: PN 1725150-3**  
**SPACER: 1711880-1**



Solid conductor range	AWG 22-24	✓
Stranded conductor	AWG 24	✓
Max. Insulation Ø (mm.)	1.60	✓
Cable Ø (mm.) range	5.0 - 9.0	✓

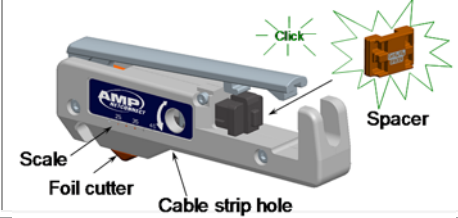


#### CABLE PREPARATION: S/FTP ("PiMF")

# S/FTP

**NOTE**

Dimensions are in mm.  
Figures are for ref. only

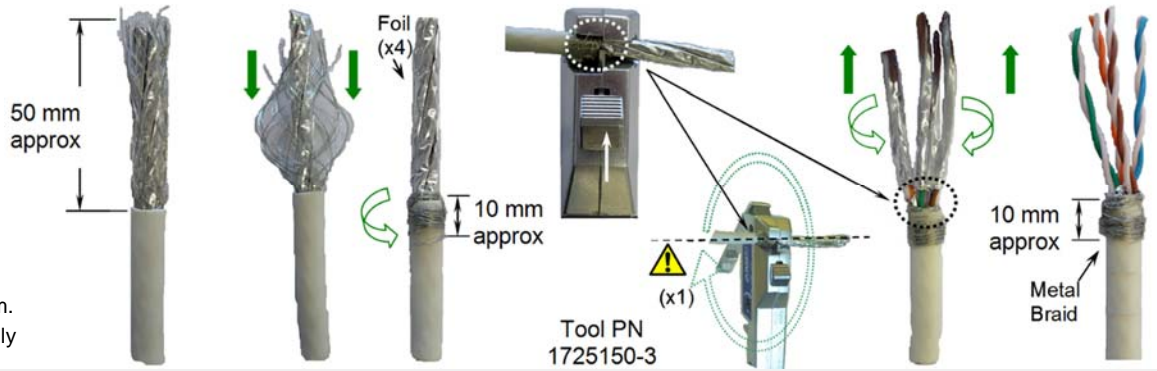


#### CABLE PREPARATION: F/FTP ("Compact")

# F/FTP

**NOTE**

Dimensions are in mm.  
Figures are for ref. only

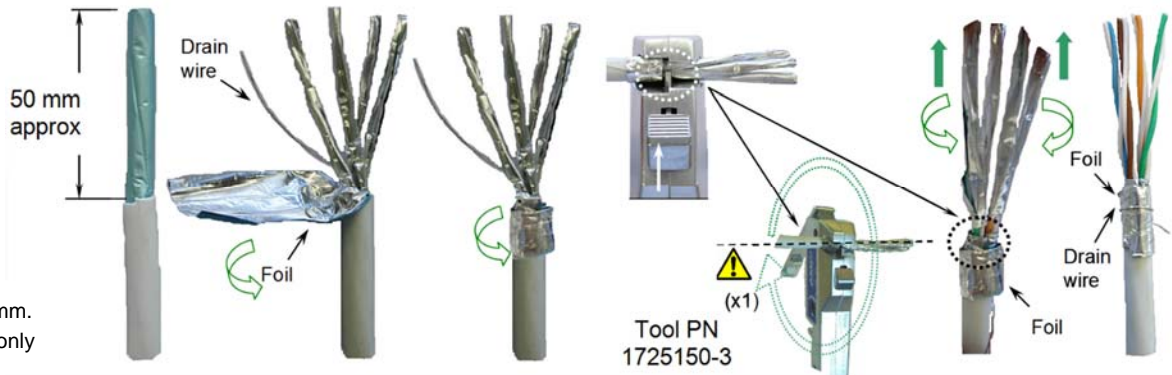


#### CABLE PREPARATION: F/UTP

# F/UTP

**NOTE**

Dimensions are in mm.  
Figures are for ref. only

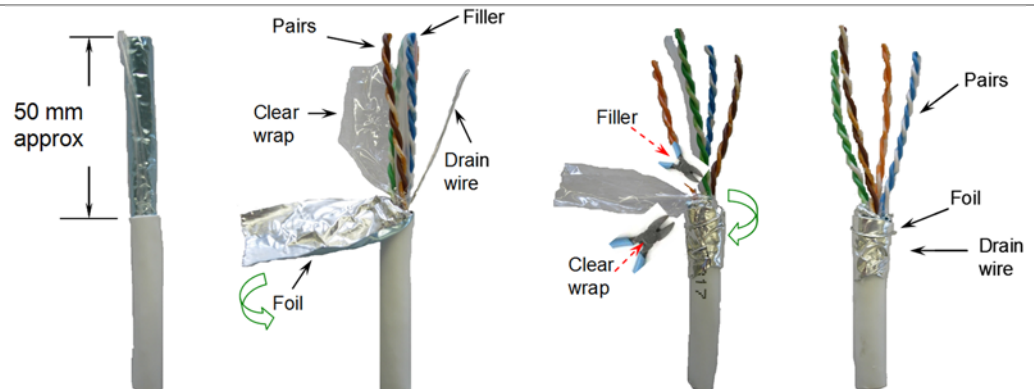

**ASSEMBLY INSTRUCTION**

<p><b>1</b></p>	<p><b>2</b> SHIELD CONTACT</p>	<p><b>3</b> COLOR CODING</p>
<p><b>4</b></p>	<p><b>5</b></p>	<p><b>6.1</b> OPEN DUST COVER <b>6.2</b></p>
<p><b>7</b></p>	<p><b>8</b> CLOSING PROCESS !! FAST!!</p>	<p><b>9</b> !! FAST!!</p>

**RE-OPENING INSTRUCTION**

<p><b>1</b> "RIGHT SIDE"</p>	<p><b>2</b> "LEFT SIDE"</p>	<p><b>3</b> PULL OUT</p>
------------------------------	-----------------------------	--------------------------