


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|--------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| 1K | 2 | A | ISSUED | 26-Sep-08 | JG JS |
| | | | | | |
| | | | | | |

1. RJ45 to 1 PAIR PLUG ACC. TO IEC 61076-3-104 PATCH CABLE ASSEMBLIES FOR PHONE APPLICATIONS ARE USED AS HYBRID PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

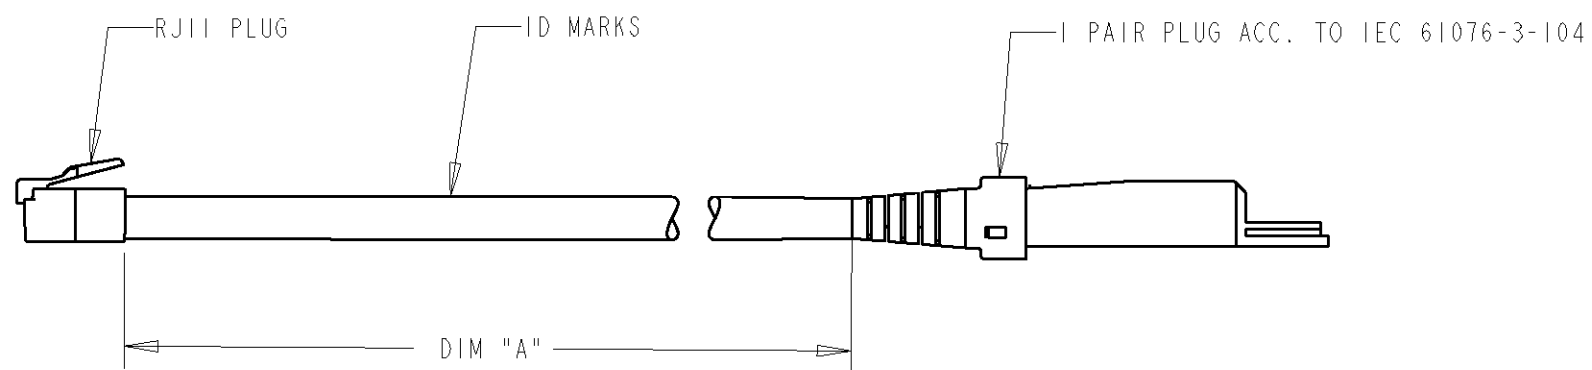

SCHEMATIC VIEW

| | | |
|------------------|---------------|-------------|
| 2-1711623-0 | 20000 - 20050 | 20,0 |
| 1-1711623-5 | 15000 - 15050 | 15,0 |
| 1-1711623-0 | 10000 - 10050 | 10,0 |
| 1-1711623-4 | 7500 - 7550 | 7,5 |
| 1711623-5 | 5000 - 5050 | 5,0 |
| 1711623-3 | 3000 - 3050 | 3,0 |
| 1711623-2 | 2000 - 2050 | 2,0 |
| 1-1711623-2 | 1500 - 1550 | 1,5 |
| 1711623-1 | 1000 - 1050 | 1,0 |
| 1-1711623-1 | 500 - 550 | 0,5 |
| TE P/N | DIM "A" | METERS, REF |
| PART NUMBER INFO | | |

| | | | | | |
|---|--|---|--|--|-----------------|
| <small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small> | | DWN J.GATNAU 26-Sep-08 CHK M.MAQUEDA 30-Sep-08 APVD J.SANABRA 30-Sep-08 | | Tyco Electronics AMP España, S.A. Barcelona, Spain. | |
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- | | NAME RJ11/1pr PLUG ACC. IEC 61076-3-104 PATCH CABLE ASSY U/UTP PHONE APPLICATIONS, LSZH STRD | |
| MATERIAL - | | FINISH - | | PRODUCT SPEC 108-93025 APPLICATION SPEC - WEIGHT - | |
| CUSTOMER DRAWING | | | | SIZE A3 | CAGE CODE 00779 |
| DRAWING NO C-1711623 | | | | RESTRICTED TO - | |
| SCALE - | | | | SHEET 1 OF 1 REV A | |