

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

2013

© COPYRIGHT 2013 BY TE CONNECTIVITY AMP ESPAÑA S.L.U. ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE	22-Oct-2013	JG	JS

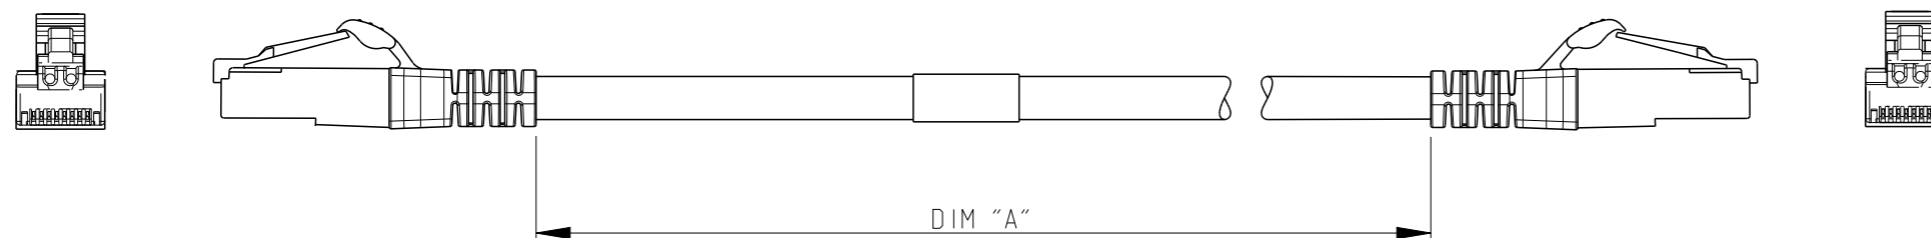

SCHEMATIC VIEW

1. RJ45 Cat.5e PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
2. FOR AVAILABLE DASH LENGTHS, DIM A SEE TE CONNECTIVITY CATALOG.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.GATNAU 22-Oct-2013																
DIMENSIONS: mm		CHK M.MAQUEDA 22-Oct-2013																
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.SANABRA 22-Oct-2013	NAME PATCH CORD RJ45 SLIM LINE															
		PRODUCT SPEC 108-93009	Cat 5e UTP															
<table border="0"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> </table>		0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±	APPLICATION SPEC -	SIZE A3	CAGE CODE -	DRAWING NO C=2153273	RESTRICTED TO -
0 PLC	±																	
1 PLC	±																	
2 PLC	±																	
3 PLC	±																	
4 PLC	±																	
ANGLES	±																	
MATERIAL -		FINISH -	WEIGHT -	SCALE -		SHEET 1 OF 1	REV A											
		Customer Drawing																