


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	ECR-13-006537	18Apr2013	LD	JS
	F	ECR-14-004439	02APR2014	LD	JS
	G	REV; MCO-40025973MCO	26OCT2015	HG	PJ

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	23 AWG Solid
	Ø RANGE in mm	0,546 < Ø ≤ 0,610
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,40
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	-
OVERALL SHIELD	BRAID MATERIAL	COPPER BRAID
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSFRZH
	OVERALL DIAMETER (D x W)	7,2mm ±0.3 x 15.2mm ±0.3
PULLING FORCE	MAX.	200 N

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT7 S/FTP XG SOLID PR04x2 AWG23 LSFRZH
- CABLE COLORED TYPES UPON REQUEST.

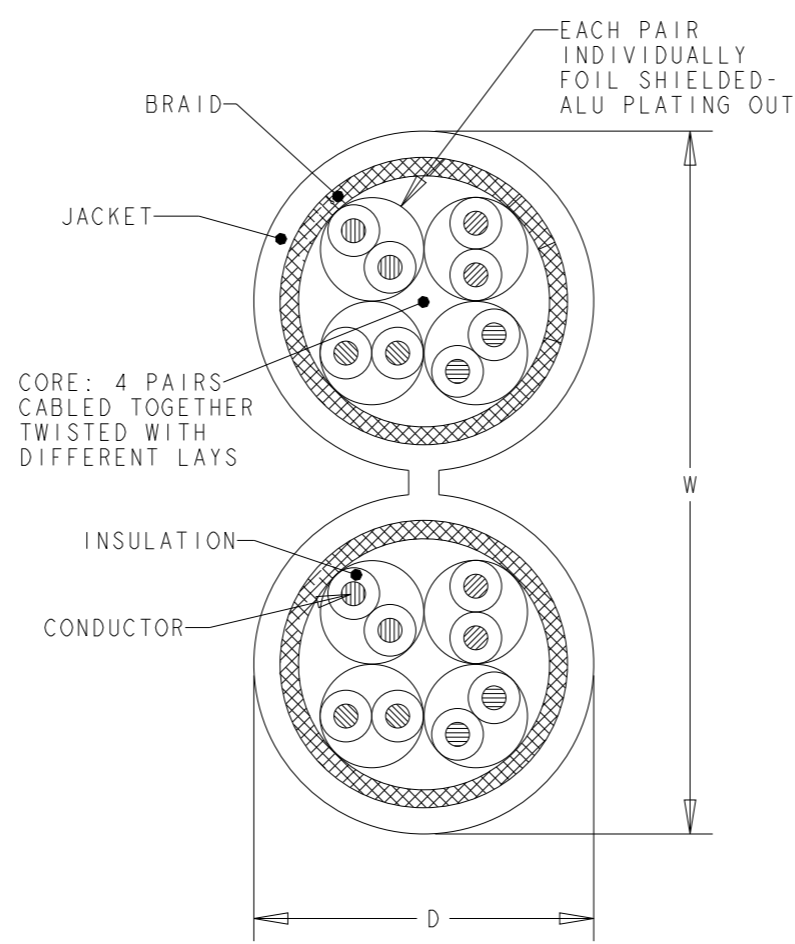

WHITE	500	REEL	1711005-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. de Dios	18Apr2013
DIMENSIONS: mm		CHK	M. Maqueda	18Apr2013
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. Sanabra	18Apr2013
0 PLC	±-	PRODUCT SPEC		
1 PLC	±-	APPLICATION SPEC		
2 PLC	±-	WEIGHT		
3 PLC	±-	Customer Drawing		
4 PLC	±-	SCALE NTS		
ANGLES	±-	SHEET 1 OF 1		
MATERIAL	FINISH	REV G		

STE TE Connectivity

NAME: CABLE, CAT7, S/FTP, PIMF600, XG, SOLID, DUAL, PR04X2, AWG23, LSFRZH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	1711005	-