


| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| 1K | 2 | E | ECR-13-006537 | 18Apr2013 | LD JS |

| FINISHED CABLE DATA | | |
|------------------------|----------------------|---------------------------------|
| CONDUCTORS | WIRE AWG | 23 AWG Solid |
| | Ø RANGE in mm | 0,546 <= Ø < 0,610 |
| | MATERIAL | COPPER |
| | PLATING | BARE |
| ELONGATION | 15% PER EN 50288-1 | |
| | | |
| INSULATION | MATERIAL | POLYETHYLENE |
| | OVERALL DIAMETER | 1,25 |
| DRAIN WIRE | Ø RANGE | 0,4 - 0,55 |
| | MATERIAL | COPPER |
| | PLATING | TINNED |
| | ELONGATION | 15% PER EN 50288-1 |
| BINDER | POLYESTER TAPE | OPTIONAL |
| INDIVIDUAL PAIR SCREEN | MATERIAL | PLASTIC LAMINATED ALUMINUM FOIL |
| OVERALL SHIELD | FOIL MATERIAL | PLASTIC LAMINATED ALUMINUM FOIL |
| OVERALL SHIELD | BRAID MATERIAL | - |
| | PLATING | - |
| | COVERAGE | - |
| | ELONGATION | - |
| JACKET | MATERIAL | LSZH |
| | OVERALL DIAMETER (D) | 7,6 x 15.5 |
| PULLING FORCE | MAX. | 200 N |

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT6 F/FTP SOLID PR04x2 AWG23 LSZH
- CABLE COLORED TYPES UPON REQUEST.

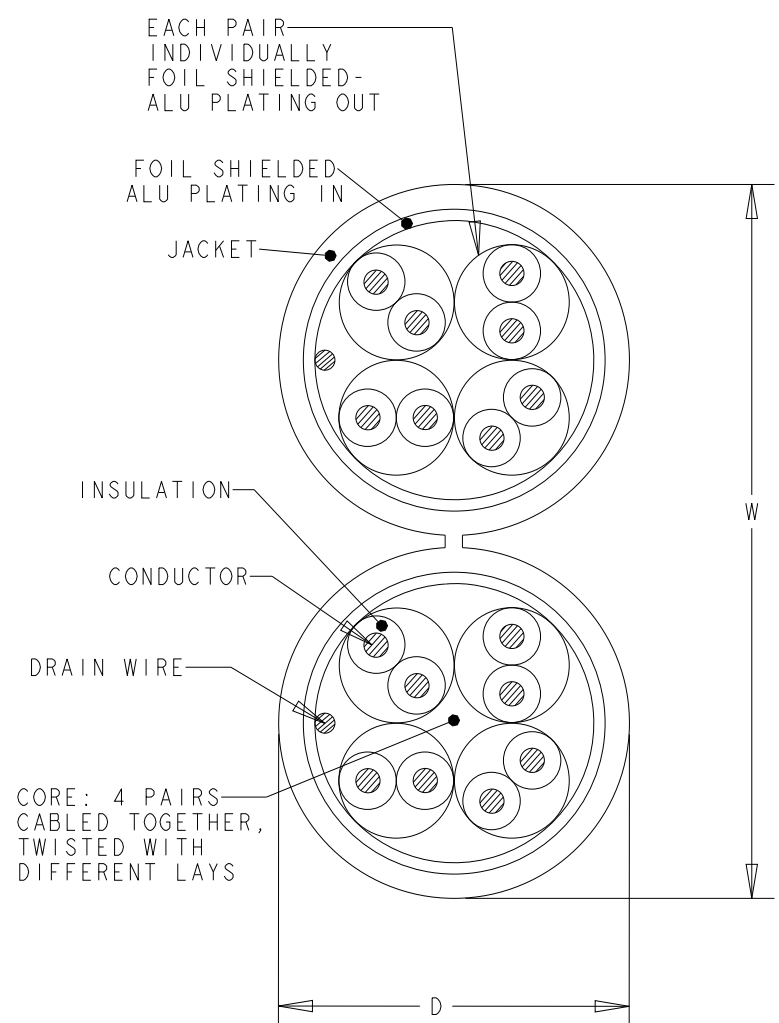

| | | | |
|--------|-----------------|---------|-------------|
| WHITE | 500 | REEL | 1711008-1 |
| COLOUR | LENGTH (METRES) | PACKAGE | PART NUMBER |

| | | | |
|--|--------|------------------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | 18Apr2013 |
| DIMENSIONS: mm | | CHK | 18Apr2013 |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | 18Apr2013 |
| 0 PLC | ±- | PRODUCT SPEC | |
| 1 PLC | ±- | APPLICATION SPEC | |
| 2 PLC | ±- | WEIGHT | |
| 3 PLC | ±- | CUSTOMER DRAWING | |
| 4 PLC | ±- | SCALE NTS | |
| ANGLES | ±- | SHEET 1 OF 1 | |
| MATERIAL | FINISH | REV E | |

STE TE Connectivity

NAME: CABLE, CAT6, F/FTP, PIMF250 COMPACT, SOLID, DUAL PR04X2, AWG23, LSZH

SIZE: A3 CAGE CODE: - DRAWING NO: 1711008 RESTRICTED TO: -