

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2015

© COPYRIGHT 2006 TE Connectivity AMP España, S.L.U. ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
L		Added pn 7-219584-2 and ECR-14-009074	17Jun2014	LD	JS
M		ECR-14-011293	24JUL2014	LD	JS
N		ECR-15-004523	24MAR2015	LD	JS
P		REV; MCO-40027857MCO	05FEB2016	HG	PJ


FINISHED CABLE DATA

CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE in mm	0,485ϕ <math><0,546</math>
	MATERIAL	COPPER
	PLATING	BARE
	ELONGATION	15% PER EN 50288-1
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	0,95
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	-
	BRAID MATERIAL	-
OVERALL SHIELD	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	PVC
	OVERALL DIAMETER (D)	5,7 mm
PULLING FORCE	MAX.	90 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.

2. CABLE PRINT LEGEND:
CAT6 UTP SOLID PR04 PVC (P/N IN 1-7-1 FORMAT) MADE IN
(MANUFACTURING COUNTRY FULLY WRITTEN OUT).

3. CABLE COLORED TYPES UPON REQUEST.

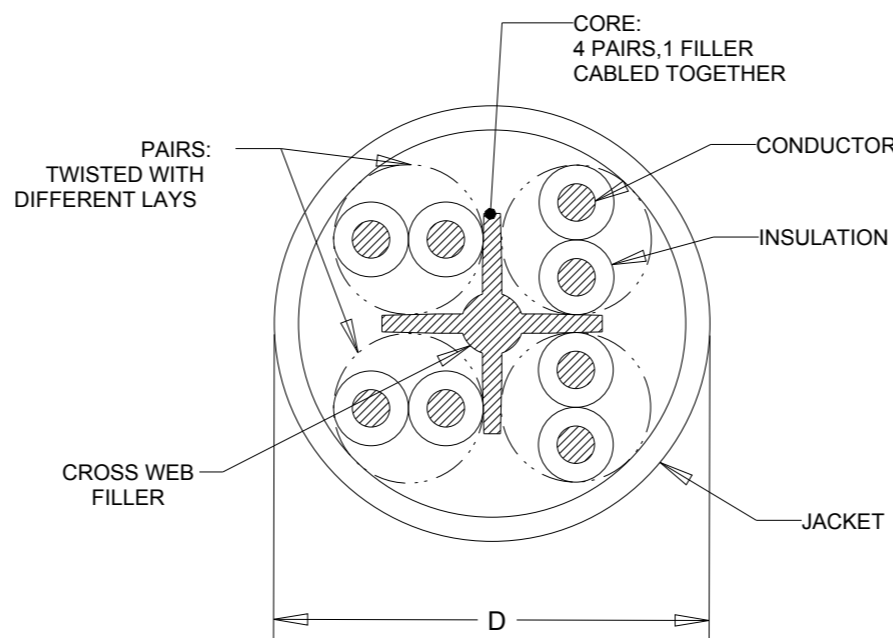

ACTIVE	WHITE	305	REEL BOX	7-219584-2
OBSOLETE	WHITE	305	PULL BOX	6-219584-2
ACTIVE	WHITE	500	REEL	4-219584-1
	WHITE	1000	REEL	219584-3
	WHITE	305	REEL BOX	219584-2
	WHITE	305	REEL	219584-1
STATUS	COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. de Dios	25Jul2014	TE Connectivity NAME CABLE, CAT6, UTP, SOLID, PR04, AWG24, PVC,	
DIMENSIONS: mm		CHK A. Martinez	25Jul2014		
		APVD J. Sanabra	25Jul2014		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE	
0 PLC ±-		-		A3	
1 PLC ±-		APPLICATION SPEC		CAGE CODE	
2 PLC ±-		-		-	
3 PLC ±-		WEIGHT		DRAWING NO	
4 PLC ±-		-		C-219584	
ANGLES ±-		CUSTOMER DRAWING		RESTRICTED TO	
FINISH		SCALE		-	
-		NTS		-	
-		SHEET		1 OF 1	
		REV		P	