

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2015

© COPYRIGHT 2006 TE Connectivity AMP España, S.L.U. ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
L		Added pn 7-219584-2 and ECR-14-009074	17Jun2014	LD	JS
M		ECR-14-011293	24JUL2014	LD	JS
N		ECR-15-004523	24MAR2015	LD	JS
P		REV; MCO-40027857MCO	05FEB2016	HG	PJ


FINISHED CABLE DATA

CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE in mm	0,485<math>\phi</math> <math><0,546</math>
	MATERIAL	COPPER
	PLATING	BARE
	ELONGATION	15% PER EN 50288-1
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	0,95
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	-
	BRAID MATERIAL	-
OVERALL SHIELD	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	PVC
	OVERALL DIAMETER (D)	5,7 mm
PULLING FORCE	MAX.	90 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.

2. CABLE PRINT LEGEND:  
CAT6 UTP SOLID PR04 PVC (P/N IN 1-7-1 FORMAT) MADE IN  
(MANUFACTURING COUNTRY FULLY WRITTEN OUT).

3. CABLE COLORED TYPES UPON REQUEST.

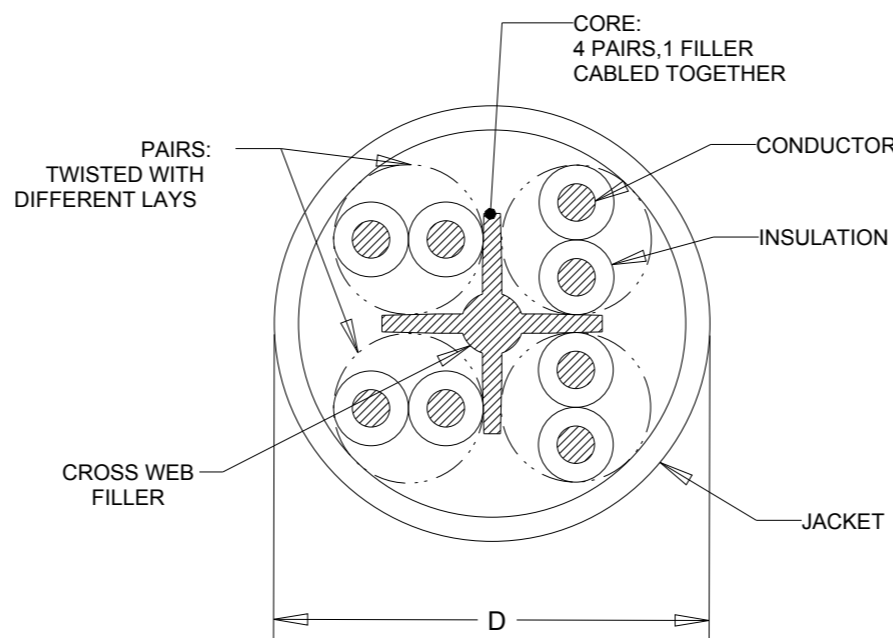

ACTIVE	WHITE	305	REEL BOX	7-219584-2
OBSOLETE	WHITE	305	PULL BOX	6-219584-2
ACTIVE	WHITE	500	REEL	4-219584-1
	WHITE	1000	REEL	219584-3
	WHITE	305	REEL BOX	219584-2
	WHITE	305	REEL	219584-1
STATUS	COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. de Dios	25Jul2014	 TE Connectivity
DIMENSIONS: mm		CHK	A. Martinez	25Jul2014	
		APVD	J. Sanabra	25Jul2014	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		NAME	
0 PLC ±-	1 PLC ±-	-		CABLE, CAT6, UTP, SOLID, PR04, AWG24, PVC,	
2 PLC ±-	3 PLC ±-	APPLICATION SPEC		-	
4 PLC ±-	ANGLES ±-	WEIGHT		-	
MATERIAL	FINISH	CUSTOMER DRAWING		SIZE	A3
-	-	SCALE		CAGE CODE	-
-	-	SHEET		DRAWING NO	C-219584
		RESTRICTED TO		-	
		SCALE		NTS	
		SHEET		1 OF 1	
		REV		P	