


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	ECR-13-001943	21FEB2013	LD	JS
	L	ECR-14-004439	02APR2014	LD	JS
	M	REV; MCO-40025973MCO	26OCT2015	HG	PJ

FINISHED CABLE DATA

CONDUCTORS	WIRE AWG	23 AWG Solid
	Ø RANGE in mm	0,546ϕ=0610
	MATERIAL	COPPER
	PLATING	BARE
INSULATION	ELONGATION	15% PER EN 50288-1
	MATERIAL	POLYETHYLENE
INSULATION	OVERALL DIAMETER	1,40
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	-
OVERALL SHIELD	BRAID MATERIAL	COPPER BRAID
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSFRZH
	OVERALL DIAMETER (D)	7,3 ±0.3 mm
PULLING FORCE	MAX.	100 N

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONA REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT7 S/FTP XG SOLID PR04 AWG23 LSFRZH
- CABLE COLORED TYPES UPON REQUEST.

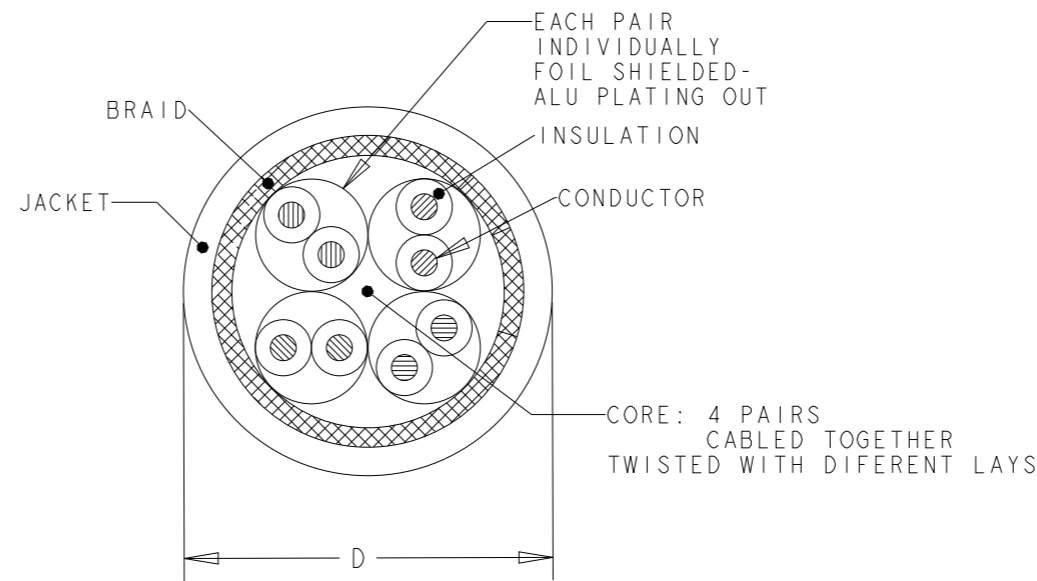

WHITE	305	REEL	57893-3
WHITE	500	REEL	57893-2
WHITE	1000	REEL	57893-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	21FEB2013
		CHK	L. de Dios
		CHK	M. Maugeda
		APVD	J. Sanabra
		PRODUCT SPEC	-
		APPLICATION SPEC	-
		WEIGHT	-
		Customer Drawing	

TE TE Connectivity			
NAME CABLE, CAT7, S/FTP, XG, PiMF600, SOLID, PR04, AWG23, LSFRZH			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	57893	-
SCALE		SHEET	REV
NTS		1 OF 1	M